Type A

Vibration mount



FIG. 01 Render

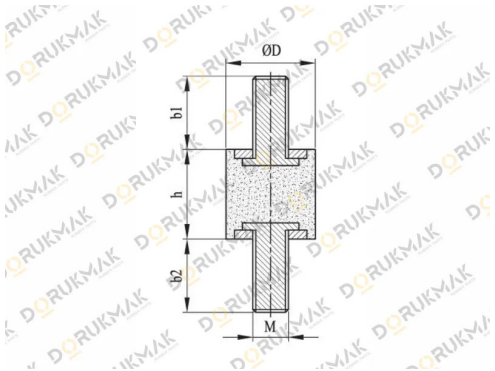


FIG. 02 Technical drawing

Product specifications

Material	NR (Natural Rubber)
Alternative material	NBR, SBR, EPDM, SILICONE also available
Metal	Zinc Coated
Hardness	55 5 Shore A
On demand hardness	35-90 Shore A
Tolerance	DIN 7715 M3
Temperature resistance	-20°C /+80°C
Working dimensions	Ø08 – Ø200 mm
Note	Other specs out of above standards are also available.

Standard sizes

Reference code	ØD (mm)	h (mm)

DA 1010	10	10
DA 1508	15	08
DA 1510	15	10
DA 1515	15	15
DA 1520	15	20
DA 2008	20	08
DA 2010	20	10
DA 2015	20	15
DA 2020	20	20
DA 2025	20	25
DA 2030	20	30
DA 2508	25	08
DA 2510	25	10
DA 2515	25	15
DA 2517	25	17
DA 2520	25	20
DA 2523	25	23
DA 2525	25	25
DA 2530	25	30
DA 3008	30	08
DA 3010	30	10
DA 3015	30	15
DA 3017	30	17
DA 3020	30	20
DA 3025	30	25
DA 3028	30	28
DA 3030	30	30
DA 3040	30	40
DA 3525	35	25
DA 3535	35	35
DA 4010	40	10

DA 4015	40	15
DA 4020	40	20
DA 4025	40	25
DA 4027	40	27
DA 4028	40	28
DA 4030	40	30
DA 4037	40	37
DA 4040	40	40
DA 4525	45	25
DA 4535	45	35
DA 5020	50	20
DA 5021	50	21
DA 5025	50	25
DA 5030	50	30
DA 5035	50	35
DA 5040	50	40
DA 5042	50	42
DA 5045	50	45
DA 5050	50	50
DA 6025	60	25
DA 6030	60	30
DA 6035	60	35
DA 6040	60	45
DA 7025	70	25
DA 7035	70	35
DA 7040	70	40
DA 7045	70	45
DA 7515	75	15
DA 7525	75	25
DA 7530	75	30
DA 7535	75	35

DA 7540	75	40
DA 7545	75	45
DA 7550	75	50
DA 7555	75	55
DA 8020	80	20
DA 10030	100	30
DA 10040	100	40
DA 10050	100	50
DA 10055	100	55
DA 10060	100	60
DA 10075	100	75
DA 12540	125	40
DA 15045	150	45
DA 15050	150	50
DA 15055	150	55
DA 15060	150	60

For a quote — Type A

The code and the annual quantity are all it takes; our sales engineers reply with a material and production proposal.

https://mail.dorukmak.com.tr/en/request-quote?sku=A
+90 224 483 60 90 · info@dorukmak.com.tr

Dimensions are in millimetres. Tolerance, material and hardness are confirmed in writing with the quote.