Type AT

Vibration mount



FIG. 01 Render

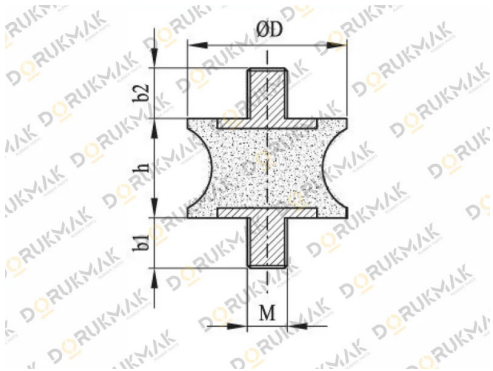


FIG. 02 Technical drawing

Product specifications

Material	NR (Natural Rubber)
Alternative material	NBR, SBR, EPDM, SILICONE also available
Metal	Zinc Coated
Hardness	55 5 Shore A
On demand hardness	35-90 Shore A
Tolerance	DIN 7715 M3
Temperature resistance	-20°C /+80°C
Working dimensions	Ø08 – Ø200 mm
Note	Other specs out of above standards are also available.

Standard sizes

Reference code	ØD (mm)	h (mm)

DAT 1010	10	10
DAT 2015	20	15
DAT 3020	30	20
DAT 4030	40	30
DAT 4537	45	37

For a quote — Type AT

The code and the annual quantity are all it takes; our sales engineers reply with a material and production proposal.

https://mail.dorukmak.com.tr/en/request-quote?sku=AT
+90 224 483 60 90 · info@dorukmak.com.tr

Dimensions are in millimetres. Tolerance, material and hardness are confirmed in writing with the quote.