Type B

Vibration mount



FIG. 01 Render

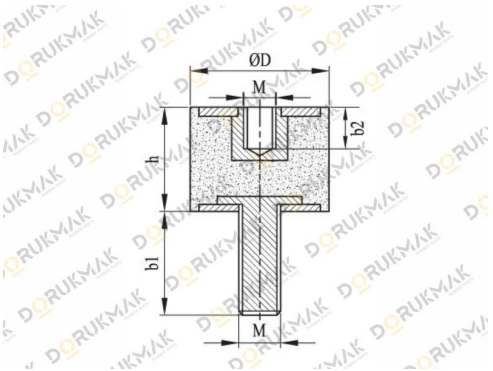


FIG. 02 Technical drawing

Product specifications

Material	NR (Natural Rubber)
Alternative material	NBR, SBR, EPDM, SILICONE also available
Metal	Zinc Coated
Hardness	55 5 Shore A
On demand hardness	35-90 Shore A
Tolerance	DIN 7715 M3
Temperature resistance	-20°C /+80°C
Working dimensions	Ø08 – Ø200 mm
Note	Other specs out of above standards are also available.

Standard sizes

Reference code	ØD (mm)	h (mm)

DB 1010	10	10
DB 1508	15	08
DB 1510	15	10
DB 1515	15	15
DB 1520	15	20
DB 2010	20	10
DB 2020	20	20
DB 2025	20	25
DB 2030	20	30
DB 2515	25	15
DB 2517	25	17
DB 2520	20	20
DB 2523	25	23
DB 2525	25	25
DB 2530	25	30
DB 3015	30	15
DB 3017	30	17
DB 3020	30	20
DB 3025	30	25
DB 3028	30	28
DB 3030	30	30
DB 3040	30	40
DB 3525	35	25
DB 3535	35	35
DB 4010	40	10
DB 4015	40	15
DB 4020	40	20
DB 4025	40	25
DB 4027	40	27
DB 4028	40	28
DB 4030	40	30

DB 4037	40	37
DB 4040	40	40
DB 4525	45	25
DB 4535	45	35
DB 5020	50	20
DB 5021	50	21
DB 5025	50	25
DB 5030	50	30
DB 5035	50	35
DB 5040	50	40
DB 5042	50	42
DB 5045	50	45
DB 5050	50	50
DB 6025	60	25
DB 6030	60	30
DB 6035	60	35
DB 6040	60	40
DB 7025	70	25
DB 7035	70	35
DB 7040	70	40
DB 7045	70	45
DB 7525	75	25
DB 7530	75	30
DB 7535	75	35
DB 7540	75	40
DB 7545	75	45
DB 7550	75	50
DB 7555	75	55
DB 7570	75	70
DB 10030	100	30
DB 10040	100	40

DB 10050	100	50
DB 10055	100	55
DB 10060	100	60
DB 10075	100	75
DB 12540	125	40
DB 15045	150	45
DB 15050	150	50
DB 15055	150	55
DB 15060	150	60

For a quote — Type B

The code and the annual quantity are all it takes; our sales engineers reply with a material and production proposal.

https://mail.dorukmak.com.tr/en/request-quote?sku=B
+90 224 483 60 90 · info@dorukmak.com.tr

Dimensions are in millimetres. Tolerance, material and hardness are confirmed in writing with the quote.