Type C

Vibration mount



FIG. 01 Render

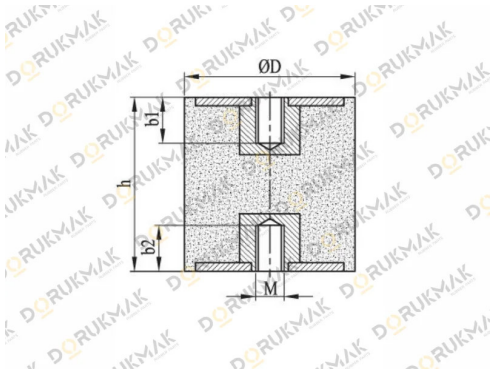


FIG. 02 Technical drawing

Product specifications

Material	NR (Natural Rubber)
Alternative material	NBR, SBR, EPDM, SILICONE also available
Metal	Zinc Coated
Hardness	55 5 Shore A
On demand hardness	35-90 Shore A
Tolerance	DIN 7715 M3
Temperature resistance	-20°C /+80°C
Working dimensions	Ø08 – Ø200 mm
Note	Other specs out of above standards are also available.

Standard sizes

Reference code	ØD (mm)	h (mm)

DC 1520	15	20
DC 2015	20	15
DC 2020	20	20
DC 2025	25	25
DC 2030	20	30
DC 2515	25	15
DC 2517	25	17
DC 2520	25	20
DC 2523	25	23
DC 2525	25	25
DC 2530	25	30
DC 3015	30	15
DC 3020	30	20
DC 3025	30	25
DC 3028	30	28
DC 3030	30	30
DC 3040	30	40
DC 3525	35	25
DC 3535	35	35
DC 4020	40	30
DC 4025	40	25
DC 4027	40	27
DC 4028	40	28
DC 4030	40	30
DC 4037	40	37
DC 4040	40	40
DC 4525	45	25
DC 4535	45	35
DC 5020	50	20
DC 5021	50	21
DC 5025	50	25

DC 5030	50	30
DC 5035	50	35
DC 5040	50	40
DC 5042	50	42
DC 5045	50	45
DC 5050	50	50
DC 6025	60	25
DC 6030	60	30
DC 6035	60	35
DC 6040	60	40
DC 7025	70	25
DC 7035	70	35
DC 7040	70	40
DC 7045	70	45
DC 7525	75	25
DC 7530	75	30
DC 7535	75	35
DC 7540	75	40
DC 7545	75	45
DC 7550	75	50
DC 7555	75	55
DC 7570	75	70
DC 10030	100	30
DC 10040	100	40
DC 10050	100	50
DC 10055	100	55
DC 10060	100	60
DC 10075	100	75
DC 12540	125	40
DC 15045	150	45
DC 15050	150	50

DC 15055	150	55
DC 15060	150	60

For a quote — Type C

The code and the annual quantity are all it takes; our sales engineers reply with a material and production proposal.

https://mail.dorukmak.com.tr/en/request-quote?sku=C
+90 224 483 60 90 · info@dorukmak.com.tr

Dimensions are in millimetres. Tolerance, material and hardness are confirmed in writing with the quote.