Type D

Vibration mount



FIG. 01 Render

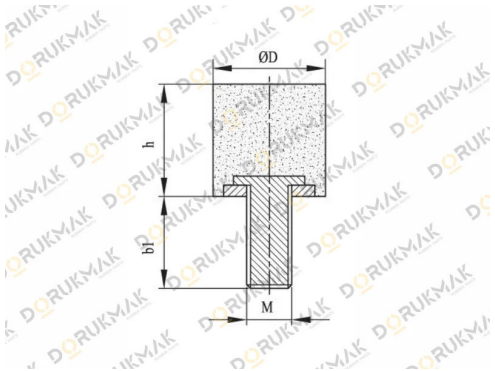


FIG. 02 Technical drawing

Product specifications

Material	NR (Natural Rubber)
Alternative material	NBR, SBR, EPDM, SILICONE also available
Metal	Zinc Coated
Hardness	55 5 Shore A
On demand hardness	35-90 Shore A
Tolerance	DIN 7715 M3
Temperature resistance	-20°C /+80°C
Working dimensions	Ø08 – Ø200 mm
Note	Other specs out of above standards are also available.

Standard sizes

Reference code	ØD (mm)	h (mm)

DD 1010	10	10
DD 1508	15	08
DD 1510	15	20
DD 1515	15	15
DD 1520	15	20
DD 2008	20	08
DD 2010	20	10
DD 2015	20	15
DD 2020	20	20
DD 2025	20	25
DD 2030	20	30
DD 2508	25	08
DD 2510	25	10
DD 2515	25	15
DD 2517	25	17
DD 2520	25	20
DD 2523	25	23
DD 2525	25	25
DD 2530	25	30
DD 3008	30	08
DD 3010	30	10
DD 3015	30	15
DD 3017	30	17
DD 3020	30	20
DD 3025	30	25
DD 3028	30	28
DD 3030	30	30
DD 3040	30	40
DD 3525	35	25
DD 3535	35	25
DD 4010	40	10

DD 4015	40	15
DD 4020	40	20
DD 4025	40	25
DD 4027	40	27
DD 4028	40	28
DD 4030	40	30
DD 4037	40	37
DD 4040	40	40
DD 4525	45	25
DD 4535	45	35
DD 5020	50	20
DD 5021	50	21
DD 5025	50	25
DD 5030	50	30
DD 5035	50	35
DD 5040	50	40
DD 5042	50	42
DD 5045	50	45
DD 5050	50	50
DD 6025	60	25
DD 6030	60	30
DD 6035	60	35
DD 6040	60	40
DD 7025	70	25
DD 7035	70	35
DD 7040	70	40
DD 7045	70	45
DD 7515	75	15
DD 7525	75	25
DD 7530	75	30
DD 7535	75	35

DD 7540	75	40
DD 7545	75	45
DD 7550	75	50
DD 7555	75	55
DD 7570	75	70
DD 8020	80	20
DD 10030	100	30
DD 10040	100	40
DD 10050	100	50
DD 10055	100	55
DD 10060	100	60
DD 10075	100	75
DD 12540	125	40
DD 15045	150	45
DD 15050	150	50
DD 15055	150	55
DD 15060	150	60

For a quote — Type D

The code and the annual quantity are all it takes; our sales engineers reply with a material and production proposal.

https://mail.dorukmak.com.tr/en/request-quote?sku=D
+90 224 483 60 90 · info@dorukmak.com.tr

Dimensions are in millimetres. Tolerance, material and hardness are confirmed in writing with the quote.