Type E

Vibration mount



FIG. 01 Render

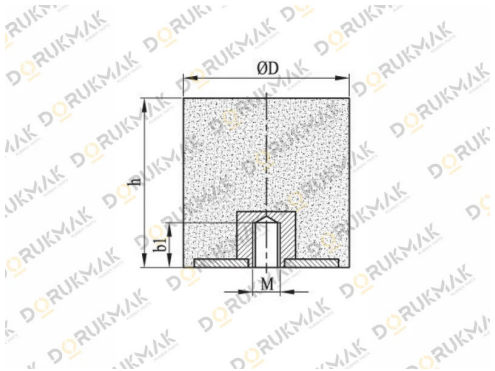


FIG. 02 Technical drawing

Product specifications

Material	NR (Natural Rubber)
Alternative material	NBR, SBR, EPDM, SILICONE also available
Metal	Zinc Coated
Hardness	55 5 Shore A
On demand hardness	35-90 Shore A
Tolerance	DIN 7715 M3
Temperature resistance	-20°C /+80°C
Working dimensions	Ø08 – Ø200 mm
Note	Other specs out of above standards are also available.

Standard sizes

Reference code	ØD (mm)	h (mm)

DE 1010	10	10
DE 1508	15	08
DE 1510	15	20
DE 1515	15	15
DE 1520	15	20
DE 2008	20	08
DE 2010	20	10
DE 2015	20	15
DE 2020	20	20
DE 2025	20	25
DE 2030	20	30
DE 2508	25	08
DE 2510	25	10
DE 2515	25	15
DE 2517	25	17
DE 2520	25	20
DE 2523	25	23
DE 2525	25	25
DE 2530	25	30
DE 3008	30	08
DE 3010	30	10
DE 3015	30	15
DE 3017	30	17
DE 3020	30	20
DE 3025	30	25
DE 3028	30	28
DE 3030	30	30
DE 3040	30	40
DE 3525	35	25
DE 3535	35	25
DE 4010	40	10

DE 4015	40	15
DE 4020	40	20
DE 4025	40	25
DE 4027	40	27
DE 4028	40	28
DE 4030	40	30
DE 4037	40	37
DE 4040	40	40
DE 4525	45	25
DE 4535	45	35
DE 5020	50	20
DE 5021	50	21
DE 5025	50	25
DE 5030	50	30
DE 5035	50	35
DE 5040	50	40
DE 5042	50	42
DE 5045	50	45
DE 5050	50	50
DE 6025	60	25
DE 6030	60	30
DE 6035	60	35
DE 6040	60	40
DE 7025	70	25
DE 7035	70	35
DE 7040	70	40
DE 7045	70	45
DE 7515	75	15
DE 7525	75	25
DE 7530	75	30
DE 7535	75	35

DE 7540	75	40
DE 7545	75	45
DE 7550	75	50
DE 7555	75	55
DE 7570	75	70
DE 8020	80	20
DE 10030	100	30
DE 10040	100	40
DE 10050	100	50
DE 10055	100	55
DE 10060	100	60
DE 10075	100	75
DE 12540	125	40
DE 15045	150	45
DE 15050	150	50
DE 15055	150	55
DE 15060	150	60

For a quote — Type E

The code and the annual quantity are all it takes; our sales engineers reply with a material and production proposal.

https://mail.dorukmak.com.tr/en/request-quote?sku=E
+90 224 483 60 90 · info@dorukmak.com.tr

Dimensions are in millimetres. Tolerance, material and hardness are confirmed in writing with the quote.